



We excel in LOW COST and HIGH QUALITY SM-1000-SS (9872-00022)

MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE

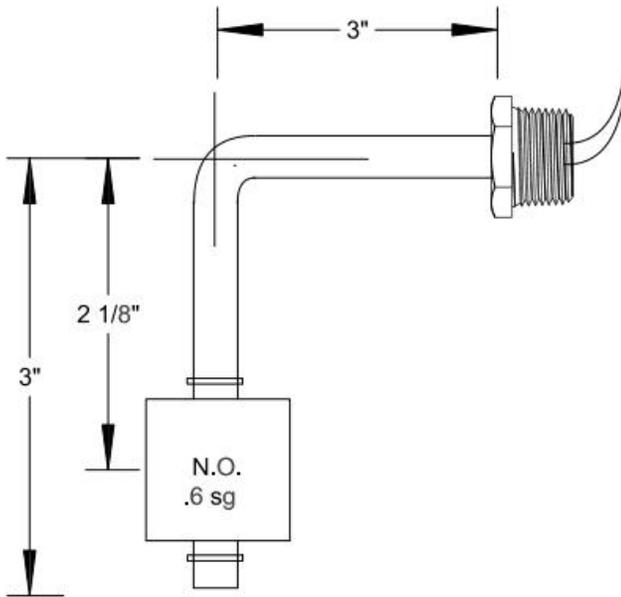

WIRING DIAGRAM

Normal is when float is away from fitting



SPECIFICATIONS

FITTING: 316 Stainless Steel, 1/2" NPT with 7/8" hex

STEM: 316 Stainless Steel, 5/16" diameter

FLOAT: 316 Stainless Steel, 1" x 1"

FLOAT STOP: Stainless Steel retaining rings

SWITCH: SPST, 50 watt maximum
265 volts and 1 amp maximum values

SWITCH OPERATION: N.O. reversible to N.C.

WIRING: Red, 18 ga. PTFE, 24" length

MAXIMUM PRESSURE: 200 PSI

OPERATING TEMPERATURE: -40 °F to +300 °F

UL FILE #: E324587



Do you need something to be different?

No problem, call or email and let us know how we can modify this product to meet your exact requirements!