


We excel in LOW COST and HIGH QUALITY  
**LD-FPI-SP12**

**MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE**

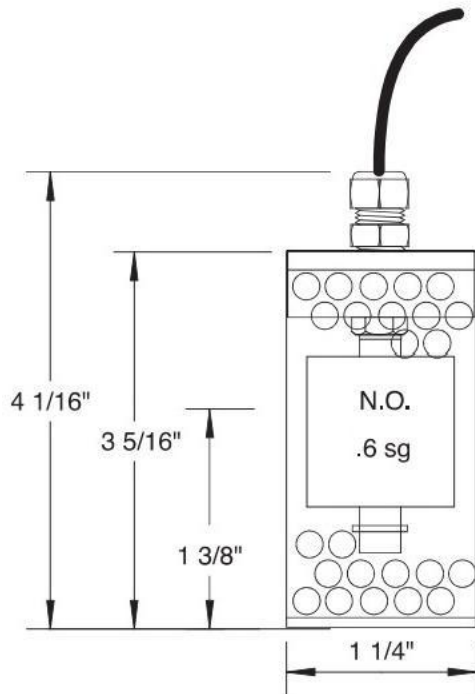

**WIRING DIAGRAM**

Normal is when float is away from fitting



**SPECIFICATIONS**

**SHROUD:** Perforated Stainless Steel

**STEM:** PVC, 5/16" dia.

**FLOAT:** Buna, 1"x1"

**SWITCH:** SPST, 50 watt maximum

265 volts and 1 amp maximum value

**SWITCH OPERATION:** N. O. reversible to N.C.

**WIRING:** 2 wire PVC cable, 22 ga., Black and Red, 16'

**MAXIMUM PRESSURE:** 25 PSI

**OPERATING TEMPERATURE:** -40 °F to +180 °F



*Do you need something to be different?*

*No problem, call or email and let us know how we can modify this product to meet your requirements.*