



We excel in LOW COST and HIGH QUALITY LD-FPI-SS15 (9873-00005)

MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE

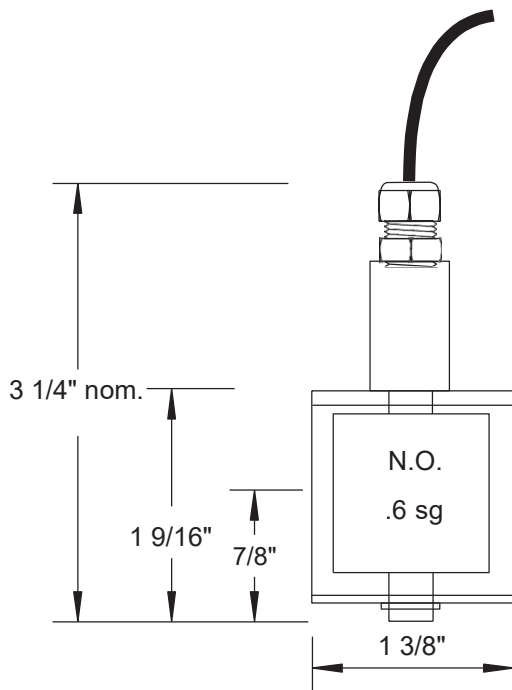

WIRING DIAGRAM

Normal is when float is away from fitting



SPECIFICATIONS

SHROUD AND STEM ASSEMBLY: Stainless Steel

FLOAT: 316 Stainless Steel, 1" x 1"

SWITCH: SPST, 50 watt maximum
265 volts and 1 amp maximum values

SWITCH OPERATION: N.O. reversible to N.C.

WIRING: 2 wire PVC cable, 22ga., Black and Red, 15'

MAXIMUM PRESSURE: 150 PSI

OPERATING TEMPERATURE: -40 °F to +180 °F



Do you need something to be different?

No problem, call or email and let us know how we can modify this product to meet your exact requirements!