


# We excel in LOW COST and HIGH QUALITY LS-1000-PP (9871-16092)

**MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE**

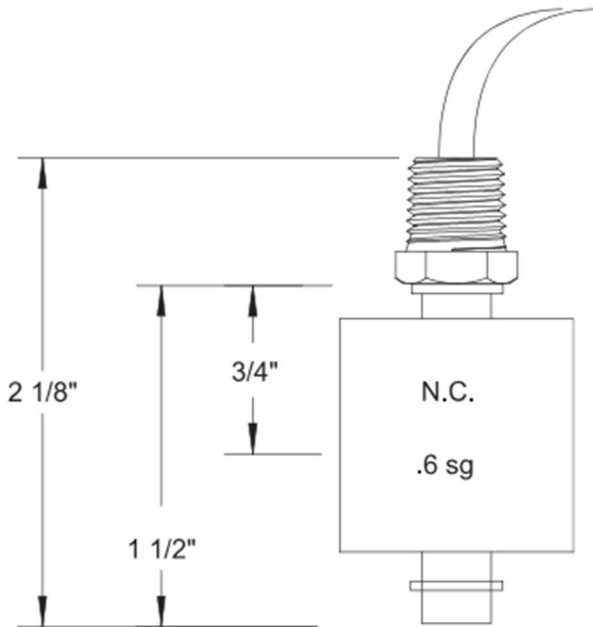

## WIRING DIAGRAM

Normal is when float is away from fitting



## SPECIFICATIONS

**FITTING:** Polypropylene, 1/8" NPT with 1/2" hex

**STEM:** Polypropylene, 5/16" diameter

**FLOAT:** Polypropylene, 1"x1"

**FLOAT STOP:** Teflon O-ring

**SWITCH:** SPST, 50 watt maximum

265 volts and 1 amp maximum value

**SWITCH OPERATION:** N.C. reversible to N.O.

**WIRING:** Red, 18 ga. PTFE, 24" length

**MAXIMUM PRESSURE:** 100 PSI

**OPERATING TEMPERATURE:** -10 °F to +150 °F



*Do you need something to be different?*

*No problem, call or email and let us know how we can modify this product to meet your exact requirements!*