



We excel in LOW COST AND HIGH QUALITY LTS-3000-SB

MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE

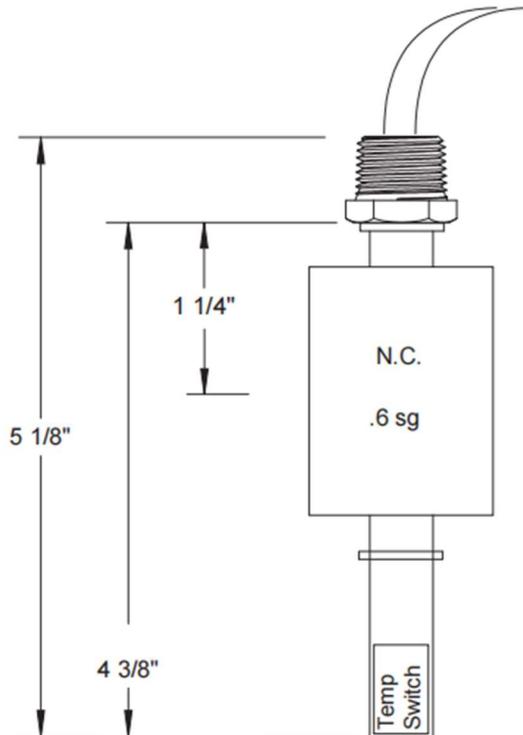

WIRING DIAGRAM

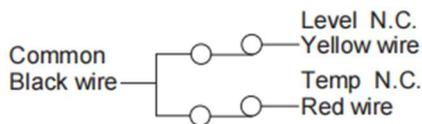

SPECIFICATIONS

FITTING: 316 Stainless Steel, 1/4" NPT with 11/16" hex

STEM: 316 Stainless Steel, 1/2" diameter

FLOAT: Buna, 1 1/4" diameter x 1 15/16" tall

FLOAT STOP: Stainless Steel retaining rings

LEVEL SWITCH: SPST, 50 watt maximum
265 volts and 1 amp maximum values
N.C. reversible to N.O.

TEMP SWITCH: 65 °C, N.C.
Specify desired temp and N.C. or N.O.

WIRING: 18 ga. PTFE, 24" length
Common: Black wire
Level switch: Yellow wire
Temp switch: Red wire

MAXIMUM PRESSURE: 150 PSI

OPERATING TEMPERATURE: -40 °F to +180 °F

UL FILE #: E324587



Do you need something to be different?

No problem, call or email and let us know how we can modify this product to meet your exact requirements.