


We excel in LOW COST and HIGH QUALITY LTS-3000-SS

MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE

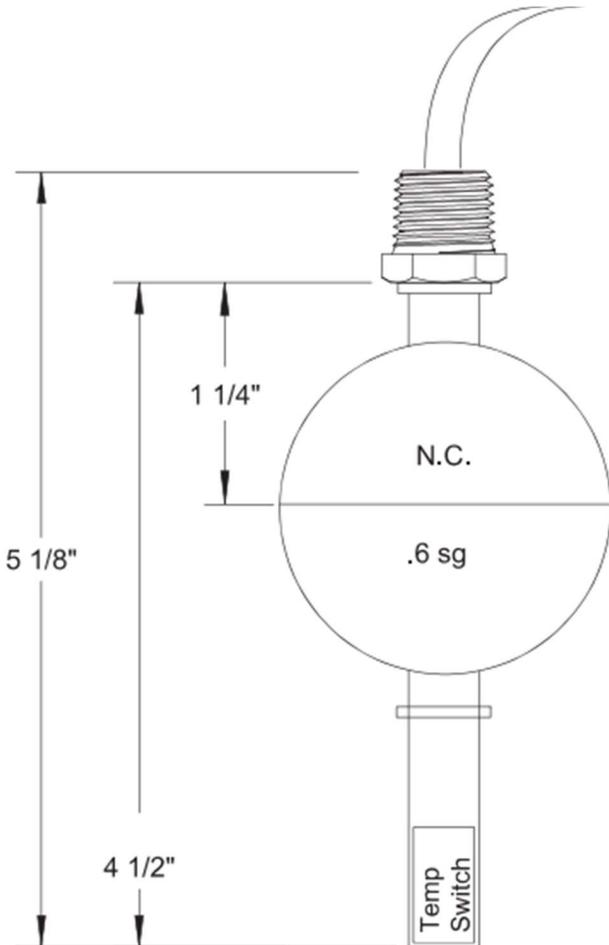

SPECIFICATIONS

FITTING: 316 Stainless Steel, 1/4" NPT with 5/8" hex

STEM: 316 Stainless Steel, 1/2" diameter

FLOAT: 316 Stainless Steel, 2 1/16" diameter

FLOAT STOP: Stainless Steel retaining rings

LEVEL SWITCH: SPST, 50 watt maximum
265 volts and 1 amp maximum values
N.C. reversible to N.O.

TEMP SWITCH: 65 °C, N.C.
Specify desired temp and N.C. or N.O.


WIRING: 18 ga. PTFE, 24" length
Common: Black wire
Level switch: Yellow wire
Temp switch: Red wire

MAXIMUM PRESSURE: 750 PSI

OPERATING TEMPERATURE: -40 °F to +300 °F

UL FILE #: E324587

WIRING DIAGRAM

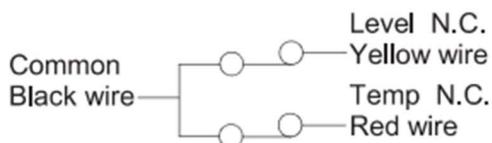

Do you need something to be different?

Call or email and let us know how we can modify this product to meet your exact requirements!

RochesterSensors.com | 800-852-9984 | salesQT@rochestersensors.com

Since the suitability of these products depends upon a wide range of factors not in our control, Rochester Sensors expects and understands that you will conduct the testing and evaluation necessary to determine that these products are suitable for your application. Whilst every effort is made to ensure the above details are correct at the time of printing, Rochester Sensors reserves the right to make material changes, and or technical changes without notification. © Rochester Sensors. 11/23 Rev 1