


# Continuous Level (0-5VDC) Configurator – Build to Order

**We excel in LOW COST AND HIGH QUALITY**

**MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE**

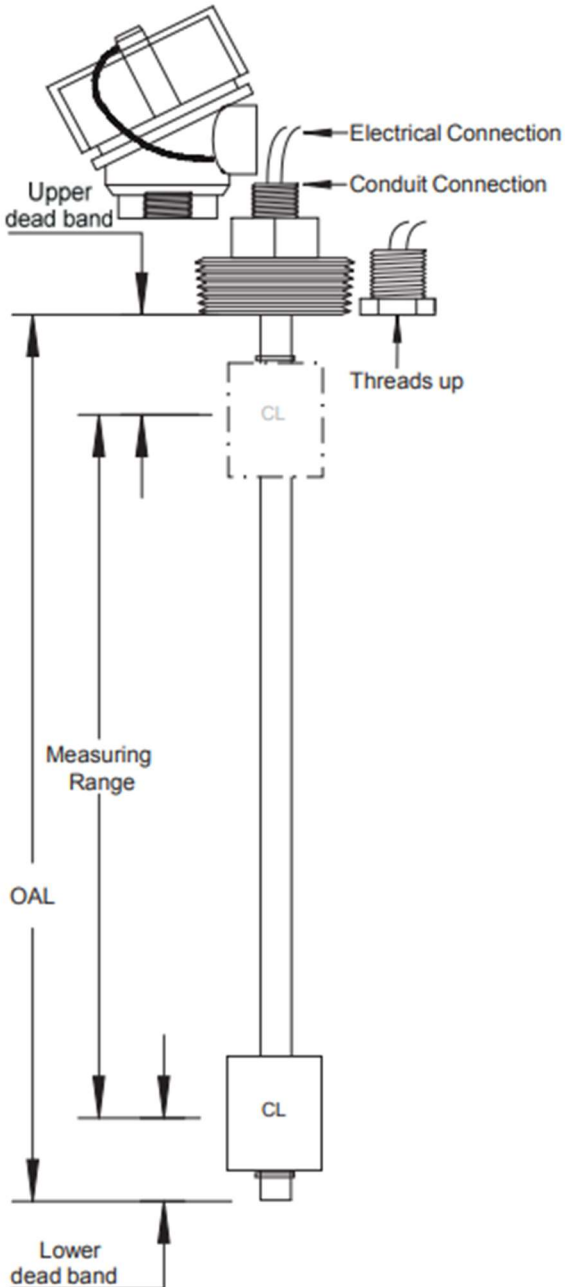

**HOUSING:**

- Nema 4X & Explosion Proof
- Watertight
- NA

**ELECTRICAL CONNECTION:**

- Wire
- Cable
- Connector (specify) \_\_\_\_\_

**WIRING:** Red Wire = Signal

White Wire = Positive input voltage

Black Wire = Negative voltage

Input Voltage = 10-30VDC

**CONDUIT CONNECTION:**

- 1/2" NPT
- Other \_\_\_\_\_
- NA

**FITTING AND STEM MATERIAL:**

- SS
- Brass

**FITTING SIZE (NPT):**

- 1/4"
- 1/2"
- 3/4"
- 1"
- 1 1/4"
- 1 1/2"
- 2"
- Flange \_\_\_\_\_
- Other \_\_\_\_\_

**THREAD ORIENTATION:**

- Threads down (*threads from outside of the tank*)
- Threads up (*threads from inside of the tank*)

**LEAD LENGTH:** \_\_\_\_\_"

**FLOAT MATERIAL:**

- SS
- Buna

**MEASURING RANGE:** \_\_\_\_\_"

(4" – 96", 1-inch increments only)

**UPPER DEAD BAND:** \_\_\_\_\_" (1" minimum)

**LOWER DEAD BAND:** \_\_\_\_\_" (1" minimum)

**OPTIONS:**

- Centering Disk
- Thermocouple \_\_\_\_\_
- Field Adjustable Length
- Thermistor \_\_\_\_\_

- Temp Switch
- N.O. or  N.C. \_\_\_\_\_ °F set point

- Interface Float (.93 sg)

**RESOLUTION:** 1/4" increments

**ACCURACY:** +/-2% of measuring range

**MAXIMUM OPERATING PRESSURE:** 200 PSI

**OPERATING TEMPERATURE RANGE:** -20 °F – 210 °F