


Continuous Level (4-20ma) Configurator - Build to Order

We excel in **LOW COST** and **HIGH QUALITY**

MANY OTHER VARIATIONS AND OPTIONS ARE AVAILABLE

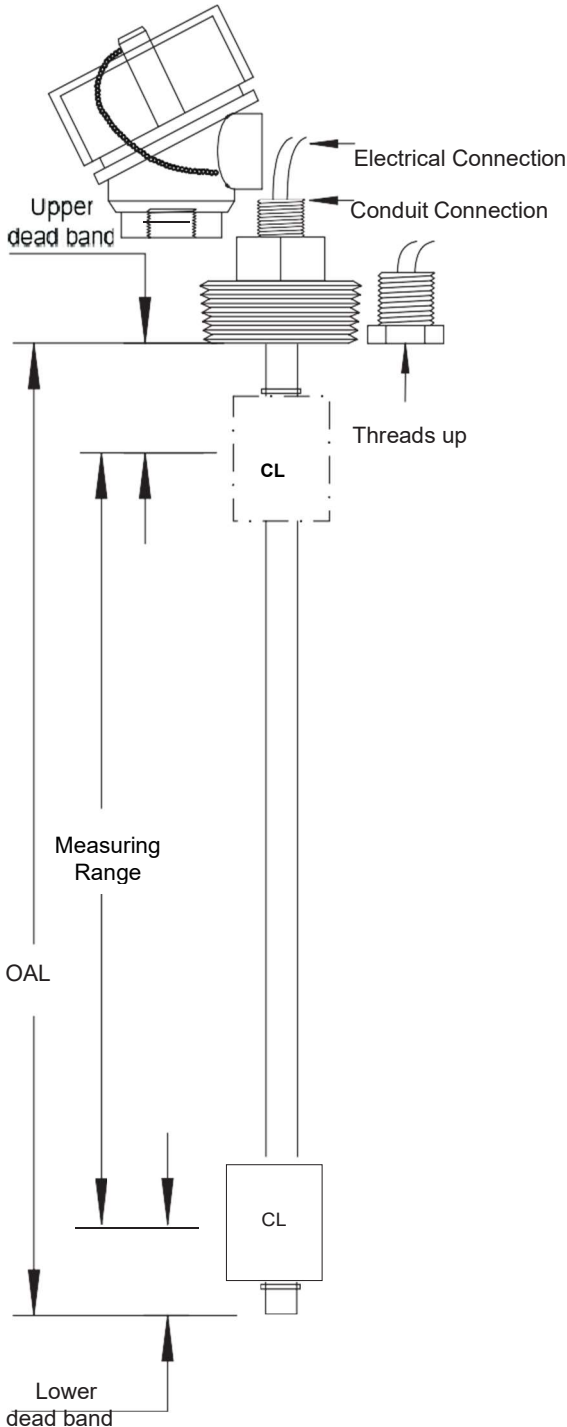

HOUSING:

- Nema 4X & Explosion Proof
- Watertight
- NA

ELECTRICAL CONNECTION:

- Wire
- Cable
- Connector (specify) _____

WIRING: Red Wire = Signal

Black Wire = Negative voltage

(Loop powered 10-30 VDC)

CONDUIT CONNECTION:

- 1/2" NPT
- Other _____
- NA

FITTING AND STEM MATERIAL:

- SS
- Brass

FITTING SIZE (NPT):

- 1/4"
- 1/2"
- 3/4"
- 1"
- 1 1/4"
- 1 1/2"
- 2"
- Flange _____
- Other _____

THREAD ORIENTATION:

- Threads down (*threads from outside of the tank*)
- Threads up (*threads from inside of the tank*)

LEAD LENGTH: _____"

FLOAT MATERIAL:

- SS
- Buna

MEASURING RANGE: _____"

(4" – 96", 1-inch increments only)

UPPER DEAD BAND: _____" (1" minimum)

LOWER DEAD BAND: _____" (1" minimum)

OPTIONS:

- Centering Disk
- Thermocouple _____
- Temp Switch
- N.O. or N.C. _____ °F set point
- Interface Float (.93 sg)
- Field Adjustable Length
- Thermistor _____

RESOLUTION: 1/4" increments

ACCURACY: +/-2% of measuring range

MAXIMUM OPERATING PRESSURE: 200 PSI

OPERATING TEMPERATURE RANGE: -20 °F - 210 °